

**UNICUS® 4i**


## 4 AND 5-STAGE HIGH PRESSURE BREATHING AIR COMPRESSORS

This game-changing filling station employs our state-of-the-art control system centered around a 15-inch HMI touch screen interface, which allows the operator to manage the entire system from the single-point touch screen. UNICUS® 4i has several innovative optional features including BAUER Gas-Tek™ monitoring system, Lab On Locale 2™ and RFID Reader.

› **PRESSURE:**  
5000 to 6000 PSIG  
(345 to 414 BAR)

› **CHARGING RATE:**  
13 to 26.4 SCFM  
(368 to 748 L/MIN)

› **POWER:**  
10 to 20 HP  
(7.5 to 15 kW)

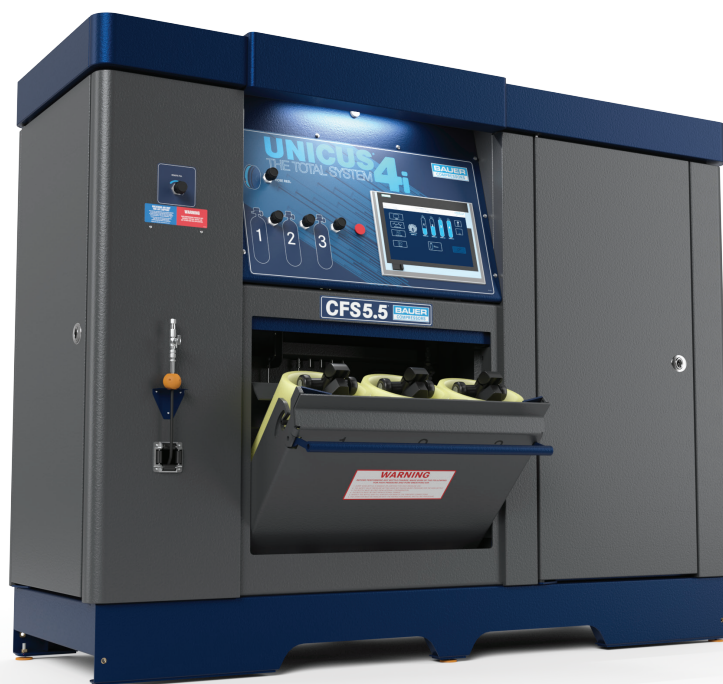

› UNICUS 4i



› UNICUS 4i  
(SHOWING INSIDE FRONT)



› UNICUS 4i  
(SHOWING INSIDE BACK)

## STANDARD SCOPE OF SUPPLY

- › BAUER breathing air purification system with B-SECURUS
- › **BAUER 15-inch HMI touch-screen** interface
- › Solid state auto cascade system
- › Compressor low oil pressure and high temperature safety shutdowns
- › Emergency stop push button
- › Ergonomic system-operations panel
- › Ergonomically designed stainless steel fill adaptors with integral bleed valve
- › Automatic condensate drain system with non-corrosive condensate reservoir and integrated float sensor and automatic “Full” indication and compressor shutdown
- › Two (2) ASME code stamped air cylinders installed in an integral rack designed to hold four cylinders
- › NFPA 1901 2016 edition compliant 3 position containment fill station accommodates SCBA or SCUBA cylinders up to 31” overall length

## AVAILABLE ACCESSORIES (FACTORY INSTALLED)

- › **BAUER Gas-Tek™** gas monitoring system
- › **Lab on Locale 2™** accredited remote air testing system
- › **RFID Reader** which reads and records data from the RFID equipped cylinders
- › Hose reel for 100’ of high pressure breathing air hose
- › Reg/RF
- › Dual Fill/3 position
- › Tri Fill/3 position
- › Additional air storage cylinders

## TECHNICAL DATA

| Model                | Charging Rate <sup>1</sup> |       | Number of Stages | Motor |     | FAD <sup>2</sup> | Purification System |
|----------------------|----------------------------|-------|------------------|-------|-----|------------------|---------------------|
|                      | SCFM                       | L/MIN |                  | HP    | kW  |                  |                     |
| 5000 PSIG (345 BAR)  |                            |       |                  |       |     |                  |                     |
| UNICUS 4i -26 - E3   | 26.4                       | 748   | 4                | 20    | 15  | 22               | P5 B-SECURUS        |
| UNICUS 4i -20 - E3   | 21                         | 595   | 4                | 15    | 11  | 17.5             | P5 B-SECURUS        |
| 6000 PSIG (414 BAR)  |                            |       |                  |       |     |                  |                     |
| UNICUS 4i -13- E1/E3 | 13                         | 368   | 4                | 10    | 7.5 | 10.8             | P2 B-SECURUS        |
| UNICUS 4i -18- E3    | 18                         | 510   | 4                | 15    | 11  | 15               | P5 B-SECURUS        |
| UNICUS 4i -25- E3    | 25.2                       | 714   | 5                | 20    | 15  | 21               | P5 B-SECURUS        |

1) Based on recharging an 80 cubic foot tank from 500 to 3000 psig.  
2) Compressor capacity referenced to standard inlet conditions. Tolerance +/- 5%

## SYSTEM FOOTPRINT

- DIMENSIONS L x W x H inches (mm)**
- › 38” x 101” x 80” (2565mm x 965mm x 2032mm)
- WEIGHT pounds (kg)**
- › 4350 - 4550 lb (1973 - 2064 kg)
- \*Weights are based on a unit equipped with 4 ASMEs